


Grain



Grain 9506



Specification according to EN 1307

Type of manufacture	Tufted 1/10 Loop pile	ISO 2424
Pile fibre composition	Solution dyed BCF Polyamide 6	ISO 2424
Dimensions	50 x 50 cm / 19,68" x 19,68"	EN ISO 24342
	(20 tiles per box)	
Primary backing	Polyester fleece	ISO 2424
Secondary backing	DESSO ProBase Polyver®	ISO 2424
Pile fibre composition	BCF Polyamide 6	ISO 2424
Total thickness	6.5 mm 0.3 inch	ISO 1765
Effective pile thickness	3.4 mm 0.13 inch	ISO 1766
Total mass	4050 g/m ² 119.5 oz/yd ²	ISO 8543
Total pile mass	620 g/m ² 18.3 oz/yd ²	ISO 2424
Effective pile mass	410 g/m ² 12.1 oz/yd ²	ISO 8543
Pile density	0.121 g/cm ³ 0.0044 lb/in ³	ISO 8543
Number of tufts	1580 /dm ² 132104 /yd ²	ISO 1763
Stroll test	≤ 2,0 kV	ISO 6356
Use classification	33 Commercial - heavy use	EN 1307
Dimensional stability	≤ 0,2 %	EN 986
Impact sound reduction ΔLW	27 dB	ISO 10140
Noise reduction	0.20 α _w	ISO 354
Thermal resistance	≤ 0,078 m ² .K/W	ISO 8302
Flammability	B _{fl} - s1 (loose laid tested)	EN 13501-1
Light Reflectance Value (LRV)	See right side page per colour	BS 8493
Colour depth (L)	See right side page per colour	CIELAB




1908
L 49,83 / LRV 18,27

4211
L 29,14 / LRV 5,89



6116
L 60,94 / LRV 29,18

7272
L 39,69 / LRV 11,06

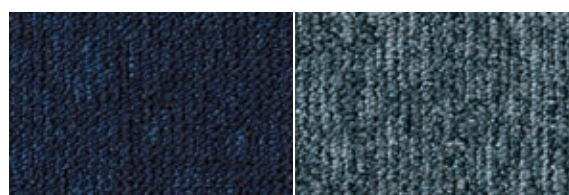

8331
L 24,14 / LRV 4,14

8833
L 40,24 / LRV 11,39



9093
L 36,64 / LRV 9,34

9094
L 41,99 / LRV 12,49



9111
L 27,88 / LRV 5,41

9501
L 31,58 / LRV 6,90



9506
L 42,94 / LRV 13,12

9990
L 20,73 / LRV 3,18

with ProBase™
backing



Cradle to Cradle Certified™ is a certification mark.
Issued by Cradle to Cradle Product Innovation Institute.

with EcoBase™
backing



Cradle to Cradle Certified™ is a certification mark.
Issued by Cradle to Cradle Product Innovation Institute.



EN 14041
0493-CPR-0002

Manufactured by

Tarkett BV
PO Box 169
NL-5240 AD
Waalwijk

