


Tarkett folder - Tarrace
size:510mm x 275mm
folded size:170mm x 275mm
color:4C



Terrace collection is inspired by the
most famous terraces around the world.

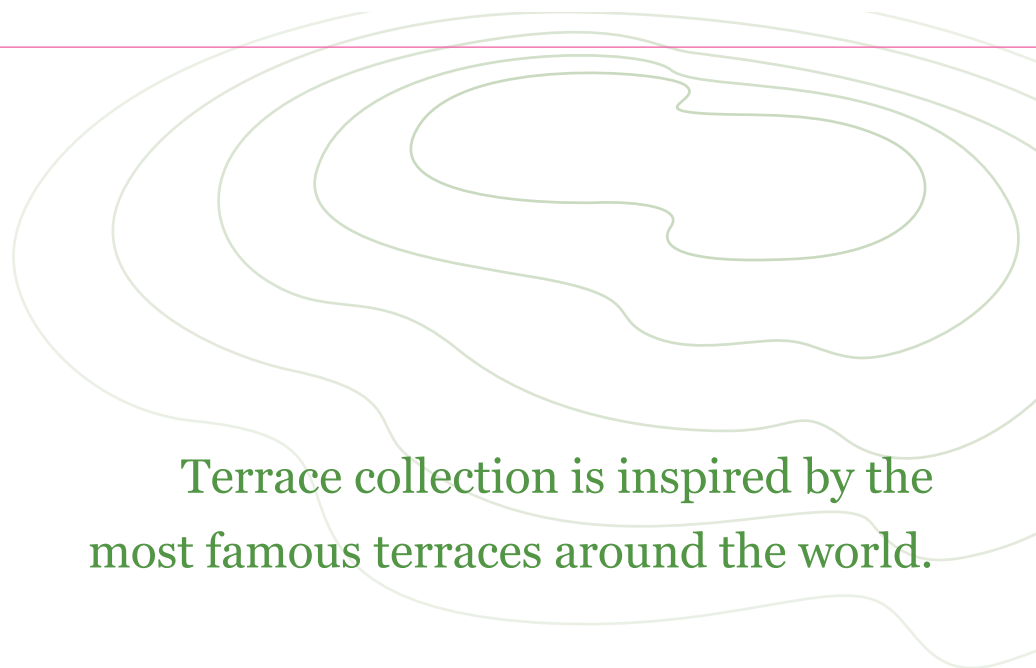

△Terrace - PISAC
Tile 50cm: 630893001



△Terrace - PADDY
Tile 50cm: 630893002



△Terrace - HAMANOIRA
Tile 50cm: 630893003




△Terrace - DOURO
Tile 50cm: 630893004




△Terrace - MACHU PICCU
Tile 50cm: 630893005




△Terrace - BANAUE
Tile 50cm: 630893006



△Terrace - HANI
Tile 50cm: 630893007



△Terrace - LONGSHENG
Tile 50cm: 630893008



△Terrace - SA PA
Tile 50cm: 630893009



Tandus commercial modular carpet

Terrace

Product Specifications

Construction		Patterned Loop
Fiber System		100% Nylon
Dye Method		Solution Dyed
Gauge		1/13"
Pile Height Average	ASTM D-418	3.5mm
Stitches per inch	ASTM D-418	9.8
Total Pile Weight		18.5 oz/yd ²
Total Product Weight		3827 g/m ² ± 5%
Density Factor	UM44D	8043 oz/yd ³
Indoor Air Quality		Comply with CRI Green Label Plus Standards ID: #GLP5288. Passes GB 18587-2001 Passes CPSC FF 1-70
Surface Flammability	ASTM D-2859	Class I (Mean average CRF: 0.45 watts/cm ² or higher)
Flooring Radiant Panel	ASTM E-648	
Electrostatic Propensity	AATCC 134	3.0 kV or lower
Colourfastness to Light	AATCC 16E	≥ 4 after 100 hours
Standard Backing		Tandus ECOPLY™ PVC Backing
Backing Customization Option		Tandus ECOBOND™ PVC Backing
Recycled Content		ECOBOND™ contains a minimum of 30% overall recycled content
Recycling		100% recyclable when recovered
Product Size		500 mm x 500 mm 667 mm x 667 mm


Product Notes

- Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
- These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
- Colours may vary slightly from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
- All products are 100% recyclable through Tandus Floorings' Infinity Initiative Program.

Warranties

15 year non - prorated limited warranty against excessive surface wear and static, delamination, edge ravel, zippering and backing resiliency loss. See warranty for details.

Installation Instructions

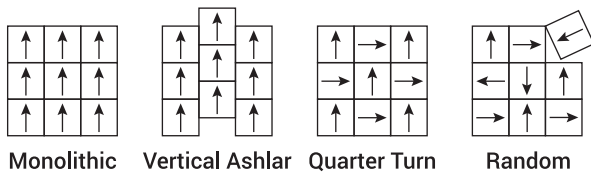

Tandus



△ Terrace – DOURO Tile 50cm: 630893004 Quarter Turn Installation

The multi-level loops
create the high-low
contrast, while the high
density of Terrace carpet
will ensure an increased
comfort for the users,
in a durable way.



△ Terrace – PISAC Tile 50cm: 630893001 Random Installation